


ECO5-915RN-WHT

Omni Directional Antenna

5 dBi with Recessed "N" Base

902 - 928 MHz

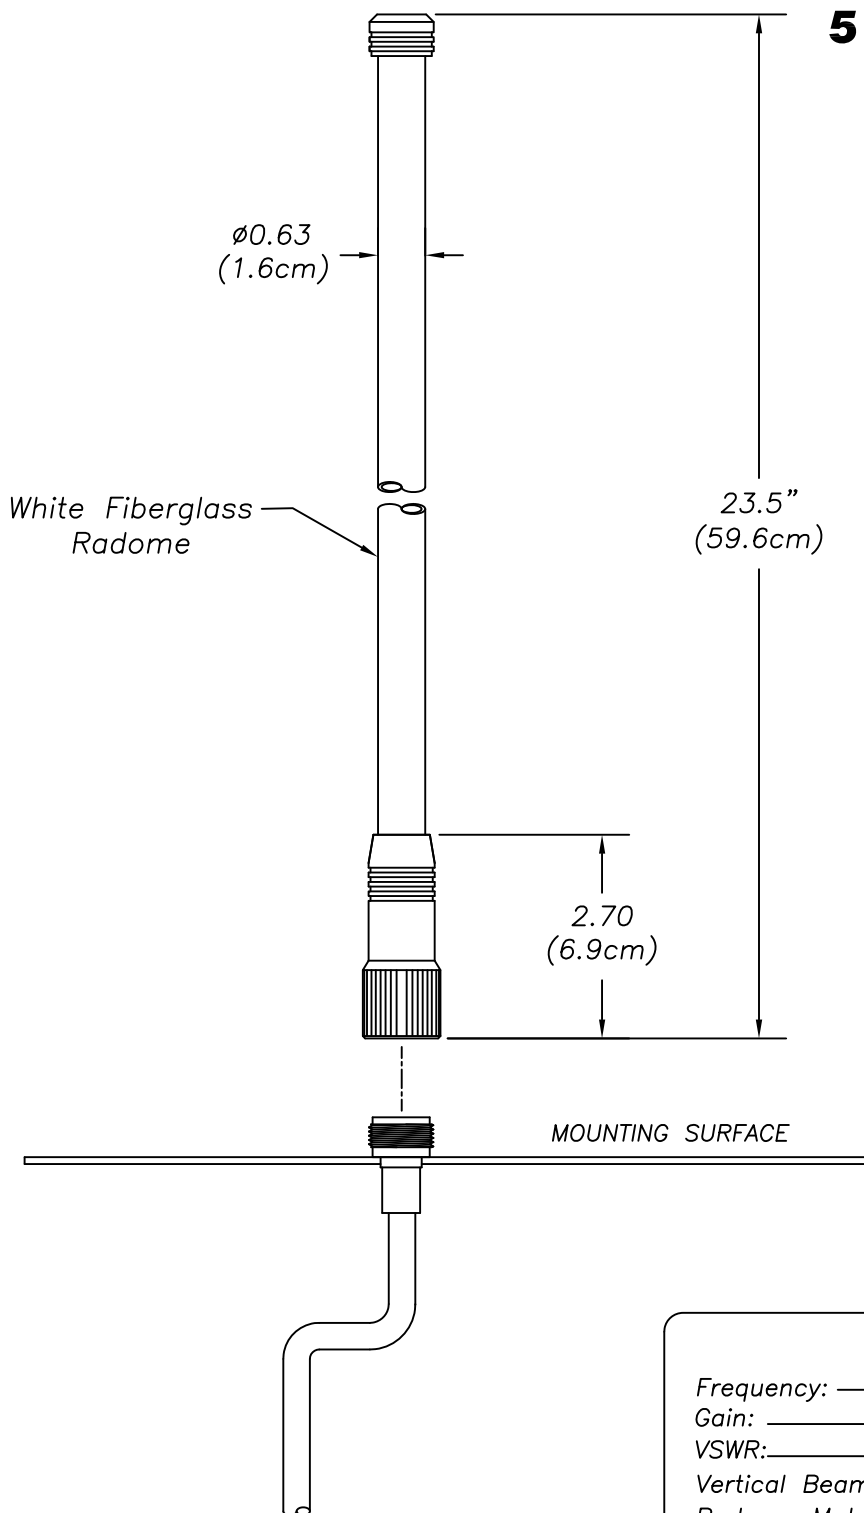

Antenna Specifications:

Frequency:	902 - 928 MHz
Gain:	5 dBi
VSWR:	2:1 Max
Vertical Beamwidth (-3 dB)	22 degrees
Radome Material:	White Fiberglass
Nominal Impedance:	50 OHM Nominal
Maximum Power:	10 Watts
Connector:	Recessed "N" Adapter Base
Lightening Protection:	External Recommended
Mount: (Mount Kit included)	Customer supplied box
Weight (with mount):	8 oz. or container
Temperature:	-40C to +80C
Wind Survivability:	100 mph minimum
	100 mph with 1/2" radial ice

Specifications subject to change without notice

JP 12/5/16 A

MobileMark

antenna solutions

US OFFICE & HEADQUARTERS: 1140 W THORNDALE AVE, ITASCA, IL 60143
TEL: (847) 671-6690 * FAX (847) 250-5120

UK OFFICE: 8 MIRAS BUS PARK, KEYS PARK ROAD, HEDNESFORD WS12 2FS, UK.
UK TEL: (+44) 1543-459555 FAX (+44) 1543-459545

VISIT OUR WEBSITE AT WWW.MOBILEMARK.COM